


# 785(E)

## PARTING LUBRICANT

### APPLICATION AREAS

- Bolts
- Screws
- Press Fits
- Pipe Threads
- Pump Sleeves

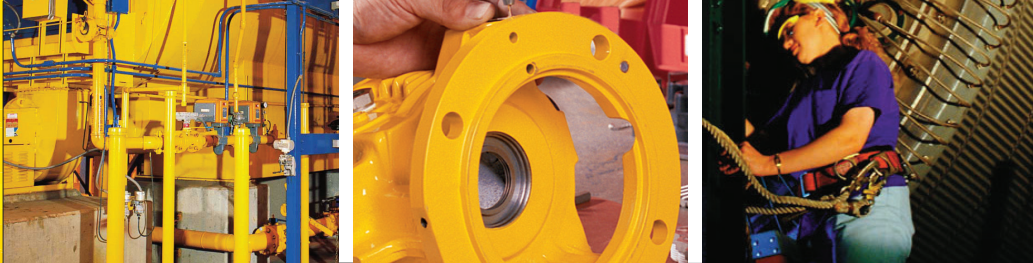

### PRODUCT DATA SHEET

#### KEY FEATURES AND BENEFITS

- Guards against galling and corrosion
- No toxic heavy metals
- Ultra-fine particles
- NSF H2 Registration Number 156782
- Fills microscopic voids
- Usable under most extreme conditions

#### PACKAGING

Aerosol  
200g Tube  
250g Brush Top  
500g Brush Top  
24kg

#### DIRECTIONS

Treat all threaded or press-fit parts before joining to make assembly and disassembly easier. Surfaces should be free of dirt, oil, grease, etc. Apply liberally to mating surfaces.

#### DESCRIPTION

Chesterton® 785(E) Parting Lubricant represents a proprietary blend of ultra-fine inorganic solid lubricants in a non-carbonizing, ashless synthetic carrier, 785(E) Parting Lubricant can be used under extremely severe conditions of temperature and pressure to assist in assembly and disassembly of threaded components. Chesterton 785(E) Parting Lubricant contains no toxic heavy metals. Plant personnel need not be concerned with health hazards associated with nickel or lead. Because 785(E) Parting Lubricant utilizes a synthetic non-carbonizing base, the product can be used over a broad temperature range.

#### TYPICAL PHYSICAL PROPERTIES

Appearance	Metallic gray
Texture	Soft paste
Specific Gravity	1.2 kg/l
Average Particle Size	< 25 microns
Dropping Point (ASTM D 566, ISO 2176)	>316°C (600°F)
Operating Temperature	-34°C to 1204°C (-30°F to 2200°F)
Skidmore-Wilhelm K(nut) Factor, Kf	0.17
4 Ball Wear Test (ASTM D 2266) Coefficient of Friction, Cf 40kgf, 1200rpm	0.10
Penetration (ASTM D 217, ISO 2137) Worked Unworked	33.4 mm 32.3 mm
Weld Point (ASTM D 2596, DIN 51 350)	400 kgf

Before using this product, please refer to Safety Data Sheet (SDS).