

# 803

## INDUSTRIAL & MARINE SOLVENT II

### APPLICATION AREAS

- *Pulp and Paper Industry  
Cleaning and Production Equipment*
- *Chemical/Oil Processing  
Production Facilities*
- *Food Industry  
Concrete Floors, Masonry, Walls,  
Engine Blocks*
- *Railroad Equipment, and  
Construction Equipment*



**CAUTION:** Should not be used on aluminum or metals sensitive to high alkalinity. When using on painted surfaces, test small area for compatibility



### PRODUCT DATA SHEET

#### KEY FEATURES AND BENEFITS

- Non-flammable
- Highly concentrated
- Economical, efficient
- Biodegradable
- Stable, clinging foam
- NSF A1 Registration Number 133966
- Compatible with pressure washers and steam cleaners

#### PACKAGING

- 1 Gallon/3.8 L
- 20 L
- 208 L
- 1000 L

#### DIRECTIONS

Dilute to desired strength. The product can be used in most types of parts washers or applied with mop, brush, sponge or spray. If necessary use stiff brush or cloth to loosen tough dirt. Like most degreasers, the speed of cleaning can be increased by heating the Chesterton 803 Industrial & Marine Solvent II.

#### DESCRIPTION

Chesterton® 803 Industrial & Marine Solvent II is one of the most powerful, non-solvent based degreasers on the market today. It is an aggressive water activated grease cutting formulation designed for severe applications where the only alternative would be a solvent based product.

Chesterton 803 Industrial & Marine Solvent II can be used to remove grease, oil, waxes, loose paint and other heavy soils from hard surfaces. It will lift many of the most stubborn stains from surfaces that are faded and discolored from repeated spills.

Applications for Chesterton 803 Industrial & Marine Solvent II exist in every industry that utilizes grease, oils, and viscous chemicals in some area of its production process. Chesterton 803 Industrial & Marine Solvent II works especially well in a heavy industry such as pulp and paper making where it has shown a dramatic effectiveness in cleaning the wire and felts on the dry end of the paper making machines. Particularly tough, resinous material left on calenders, machines, and floors can be easily removed with a combination of steam and this powerful cleaner.

Chesterton 803 Industrial & Marine Solvent II is a very concentrated, industrial degreaser. For light soil removal, it can be used economically at high dilutions of 1:40 or greater.

#### TYPICAL PHYSICAL PROPERTIES

Appearance	Red, Transparent liquid
Flash Point	None
Specific Gravity	1.06
Solubility in Water	Complete
pH	13.5
Density	1.06 kg/l (8.9 lb/gal)
Foaming Level	Moderate
Freeze Thaw Stability	Passed 6 cycles


Before using this product, please refer to Safety Data Sheet (SDS).

Technical information continues on page 2


# 803

## INDUSTRIAL & MARINE SOLVENT II

### pH Dilution Curve

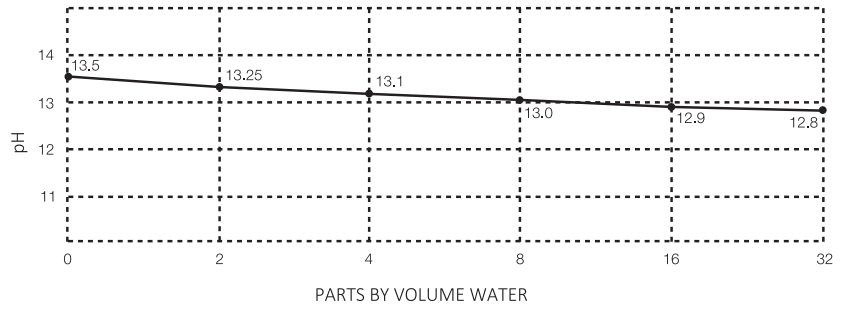

### Brix vs. % Concentration

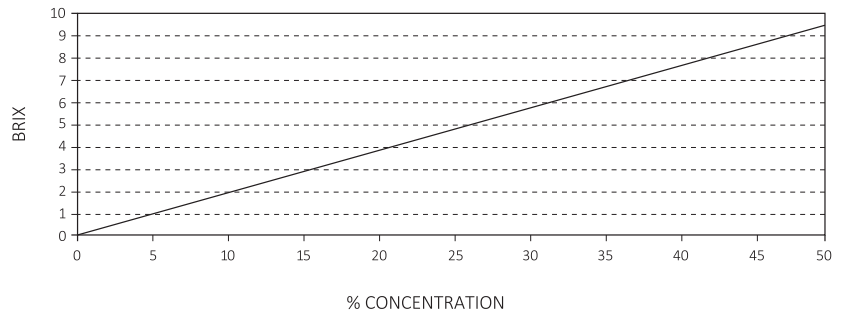

### Recommended Minimum Concentrations (In Water)

General Cleaning	5%
Heavy Duty Cleaning	20%
Light Cleaning	3%
Acrylic Floor Finish Removal	10%
Painted Surfaces	5%
Crayon Removal	up to concentrated
Built Up Acrylic Floor Finishes	20%